

TDS - TAPE 301 AFL

PREMIUM SOLVENT-FREE ALUMINUM FOIL TAPE WITH LINER

PRODUCT DESCRIPTION:

Bock TAPE 301-AFL is a premium aluminum foil tape with a 30µm backing thickness, strong emulsion acrylic adhesive and equipped with an easy-release silicone paper liner. 301-AFL is used for applications where strong holding power, superior conformability and high resistance to extreme temperature conditions and aging are required. TAPE 301-AFL is typically used for FSK facing joints, HVAC duct application and as well for high temperature masking applications in the pipe coating industry.


FEATURES & BENEFITS

- Strong Adhesion
- Highly Conformable
- High Reflection of Heat & Light

TYPICAL APPLICATIONS: Solvent-free tape with strong adhesion and holding power offers permanent sealing and bonding on Foil-Scrim-Kraft Facing joints and seams in HVAC ductwork application.

PROPERTIES

Adhesive System	Emulsion Acrylic
Backing	Deadsoft Aluminum
Backing Thickness	30µm
Adhesive Coating	40µm
Total Thickness	70µm
Country of Origin	China
Core Diameter	76.2mm
Available Sizes	48mm, 75mm
Length	50m

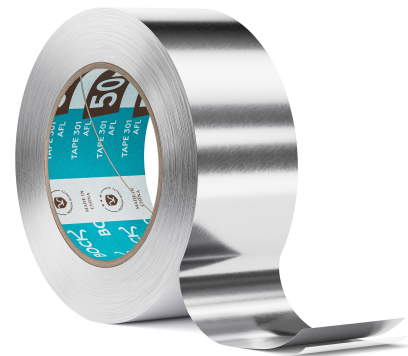

TECHNICAL DATA

Property	Nominal Value	Norm
Elongation at Break	3%	ASTM D3759
Tensile Strength	65N/25cm	ASTM D3759
Adhesion to Steel	12N/25cm	ASTM D3330
Rolling Ball Tack	5 cm	ASTM D3121-06
Application Range	+10°C - +50°C	
Operating Range	-30°C - +150°C (250°C short exposure)	

ADDITIONAL INFORMATION

Customization: Aside from the standard widths and lengths, Bock TAPE 301 AFL can be supplied as well in various other dimensions, based on the need of the applicator. Please reach out to our sales representatives to develop the customized solution for your needs.

Storage & Shelf Life: It is good practice to use the product within 12 months from purchase date. The rolls must be kept in their original packaging. Keep the product out of the light and protect it from direct heat sources. The tape must be kept in a dry place, at a humidity level below 65%, preferably at a temperature between 15° C and 25° C. If the storage temperature is different, restore the tape back to above level before using it.

TDS - TAPE 301 AFL

This Technical Data Sheet (TDS) is provided by BOCK for information only. The contents of this TDS are considered to be reliable but accuracy is not guaranteed. The results shown in this TDS may not be relevant to all users of the product and it is the user's responsibility to determine the suitability of the product for its intended purpose. BOCK expressly disclaims all express or implied warranties including merchantability and fitness for a particular purpose to the fullest extent permitted by law and does not accept responsibility or liability (whether direct, indirect, or consequential) arising from use of the product or reliance on the TDS. BOCK does not exclude liability for death or personal injury arising from its negligence or fraud. BOCK refers to Bock Middle East FZCO and its subsidiaries.

