

## TDS - TAPE XPRT 1330

### PREMIUM INDUSTRIAL GRADE MARINE MASKING TAPE

#### PRODUCT DESCRIPTION:

TAPE XPRT 1330 offers superior performance for demanding marine painting and coating applications. It sticks to a wide variety of surfaces, stays positioned, and gives outstanding clean paint lines. Being 100 percent waterproof and UV resistant, it is the ideal tape for harsh and demanding outdoor application conditions.


#### FEATURES & BENEFITS

- Clean Removal
- UV resistant
- Waterproof

**TYPICAL APPLICATIONS:** TAPE XPRT 1330 offers ultimate performance for demanding marine applications with with exposure to UV radiation and water.

#### PROPERTIES

Adhesive System	Natural Rubber
Backing	Semi-Crepe Paper
Paper Weight	70g/m <sup>2</sup>
Total Thickness	150µm
Color	Blue
Country of Origin	Italy
Core Diameter	76mm
Available Sizes	24mm, 48mm
Length	50m

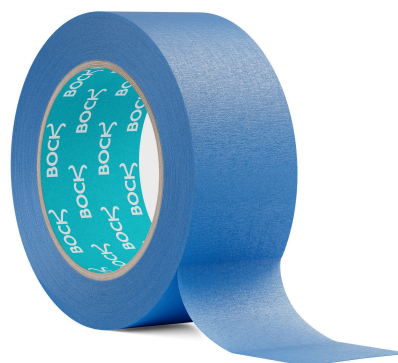

#### TECHNICAL DATA

Property	Nominal Value	Norm
Elongation at Break	9 %	ASTM D3759
Tensile Strength	5 Kg/cm	ASTM D3759
Adhesion to Steel	320 g/cm	ASTM D3330
Rolling Ball Tack	1 cm	ASTM D3121-06
Temperature Resistance	+130°C (30min)	
Removal Time	15 days Outdoor	

#### ADDITIONAL INFORMATION

**Customization:** Aside from the standard widths and lengths, Bock TAPE XPRT 1330 can be supplied as well in various other dimensions, based on the need of the applicator. Please reach out to our sales representatives to develop the customized solution for your needs.

**Storage & Shelf Life:** It is good practice to use the product within 12 months from purchase date. The rolls must be kept in their original packaging. Keep the product out of the light and protect it from direct heat sources. The tape must be kept in a dry place, at a humidity level below 65%, preferably at a temperature between 15° C and 25° C. If the storage temperature is different, restore the tape back to above level before using it.

#### TDS - TAPE XPRT 1330

This Technical Data Sheet (TDS) is provided by BOCK for information only. The contents of this TDS are considered to be reliable but accuracy is not guaranteed. The results shown in this TDS may not be relevant to all users of the product and it is the user's responsibility to determine the suitability of the product for its intended purpose. BOCK expressly disclaims all express or implied warranties including merchantability and fitness for a particular purpose to the fullest extent permitted by law and does not accept responsibility or liability (whether direct, indirect, or consequential) arising from use of the product or reliance on the TDS. BOCK does not exclude liability for death or personal injury arising from its negligence or fraud. BOCK refers to Bock Middle East FZCO and its subsidiaries.

